



HeatPro

Professional Protection Made Simple




SEE THE DIFFERENCE

with Hikvision HeatPro Series Thermal Cameras

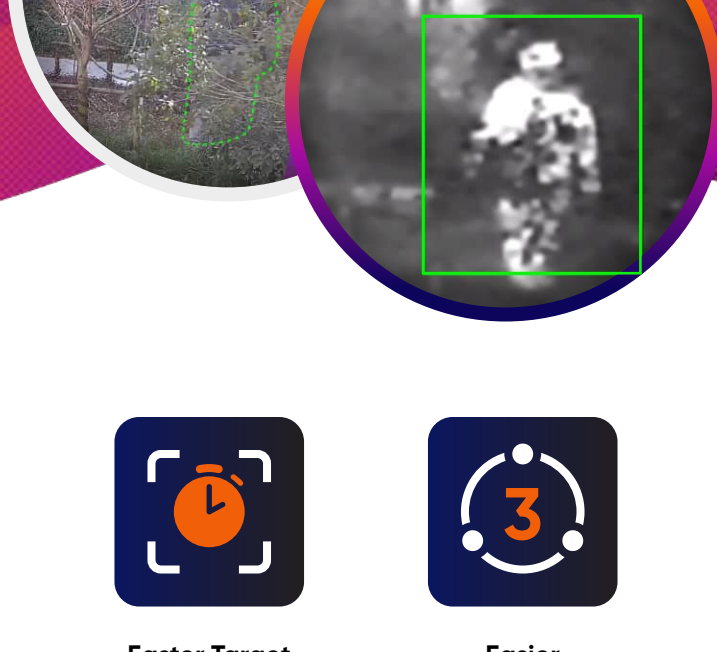**Better Target Classification Accuracy**


Focusing on humans and vehicles

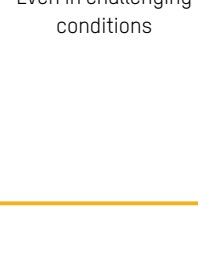**Faster Target Detection**

Even in challenging conditions

**Easier Deployment**

With three-step configuration

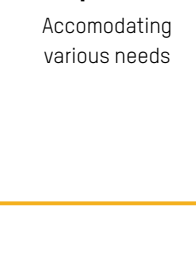**More Product Combination Options**


Accommodating various needs

Better target classification performance

Accurate recognition of human and vehicle, reduces false alarms efficiently.



Multiple Targets Detection

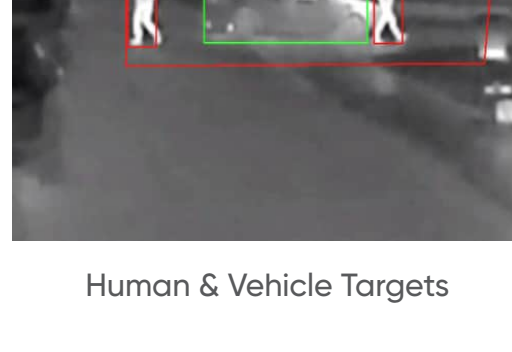


Human & Vehicle Targets

Faster detection in challenging conditions

Targets are detected quickly in high temperature and straight moving scenarios.




Low Contrast Scenario

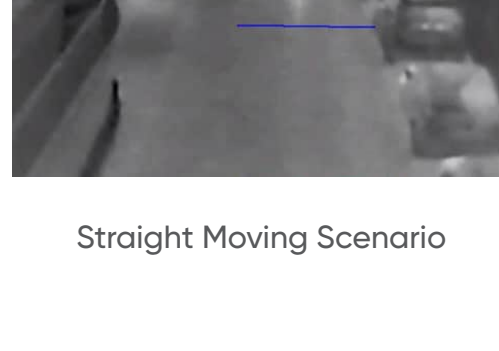

Straight Moving Scenario

More flexible solution combination

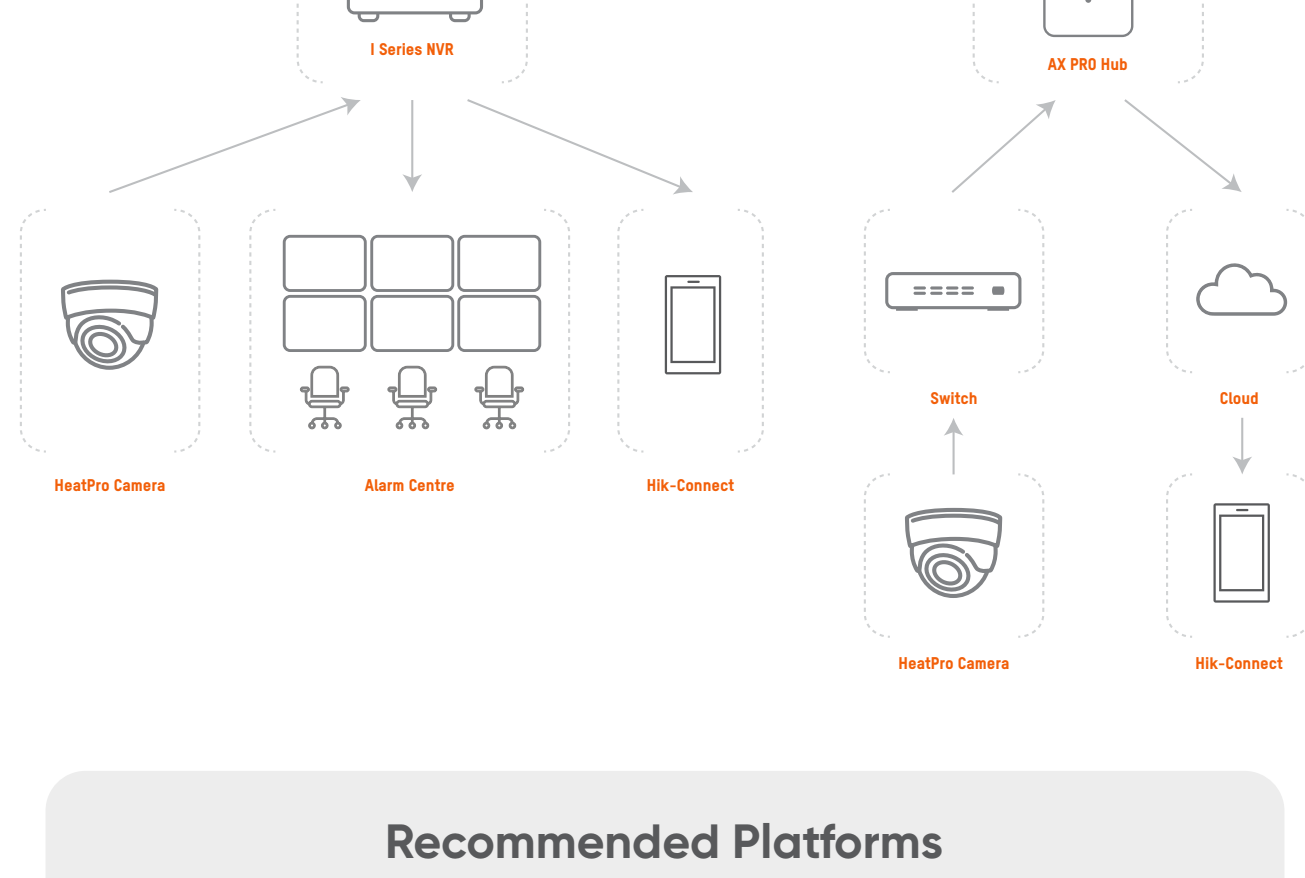


Recommended Platforms



HikCentral



iVMS-4200



Hik-Connect

APPLICATIONS



Residential



Warehouse



Car Park




Enterprise Car Park



Construction Site



Wooden Building

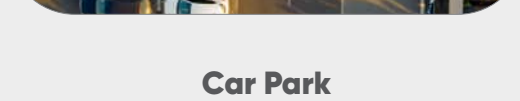

Utility



Factory

Short distance perimeter detection (up to 77m)

- High accuracy perimeter detection
- Superior environmental adaptability
- High visibility for hidden objects

Indoor fire prevention / temperature measurement

- Early warning before fire happens
- Flexible temperature measurement rule
- Wide temperature measurement range, up to 150°C

PRODUCT SHOWCASE



DS-2TD1217-x/PA




DS-2TD2617-x/PA

- 160*120 resolution
- Human/Vehicle Classification using deep learning
- Temperature accuracy: $\pm 8^{\circ}\text{C}$
- Temperature measuring range: $-20\sim 150^{\circ}\text{C}$
- Built-in strobe light and audio alarm
- Optical channel: 4MP



DS-2TD1228-x/QA

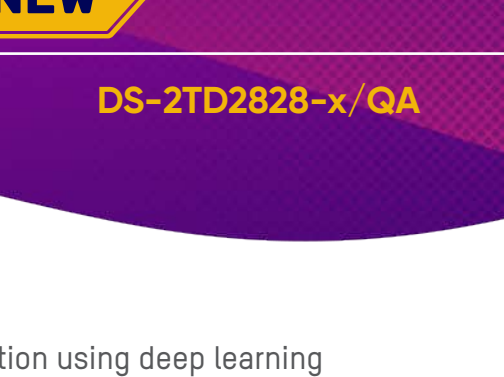

DS-2TD2828-x/QA

- 256*192 resolution
- Human/Vehicle Classification using deep learning
- Temperature accuracy: $\pm 8^{\circ}\text{C}$
- Temperature measuring range: $-20\sim 150^{\circ}\text{C}$
- Built-in strobe light and audio alarm
- Optical channel: 4MP

DS-2TDxx17-10/PA

48m

DS-2TDxx28-10/QA

77m

DS-2TDxx17-6/PA

30m

DS-2TDxx28-7/QA

56m

DS-2TDxx17-3/PA

15m

DS-2TDxx28-3/QA

24m

DS-2TDxx17-2/PA

9m

DS-2TDxx28-2/QA

16m

Human VCA detection distances



Max human detection distance for 160 resolution



Max human detection distance for 256 resolution