



## REG-D1 License Plate Cameras



- ▶ License plate capture with color overview camera for surrounding area surveillance
- ▶ High-speed capture to 160 km/h (100 mph)
- ▶ Integrated LED illumination for night-time image capture
- ▶ Ambient rejection technology eliminates problems caused by headlight glare
- ▶ Low voltage, energy efficient operation
- ▶ Compact and installation friendly design

The REG-D1 series delivers advanced license plate capture performance and features a high resolution day/night overview camera for surrounding area surveillance to identify vehicle model and color.

REG-D1 integrates advances in optics, electronics, infrared illumination and ambient rejection technology to overcome all the challenges typically associated with license plate capture to deliver consistent, reliable images in the most challenging of conditions

With an operational range of up to 30 m (100 ft) or 25 m (80 ft) depending on number plate size, the REG-D1 delivers high contrast license plate images across the complete spectrum of ambient lighting from total darkness to direct glare from sunlight or vehicle headlights regardless of the prevailing lighting conditions. The camera can capture clear plate images from vehicles traveling at speeds of up to 160 km/h (100 mph), making REG-D1 suitable for motorways and highways applications.

The camera housing is weather sealed and IP66 / NEMA 4 rated for field-proven performance in the most extreme surveillance conditions. LED infrared illumination ensures consistent, reliable capture day and night.



REG-D1 is designed to work with NVRs and DVRs, and is specifically engineered for easy integration with third party ANPR software.

### Applications


- ANPR
- Traffic Monitoring
- Border Control
- Parking
- Security and Access Control
- Post event investigation
- Police

## Installation/Configuration Notes

### Dimensions

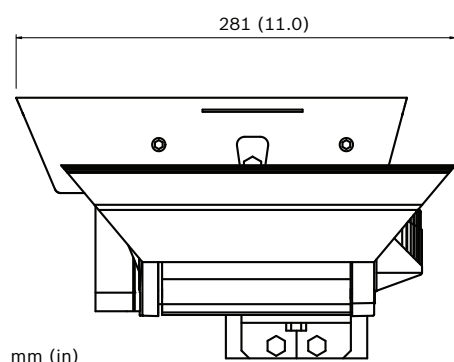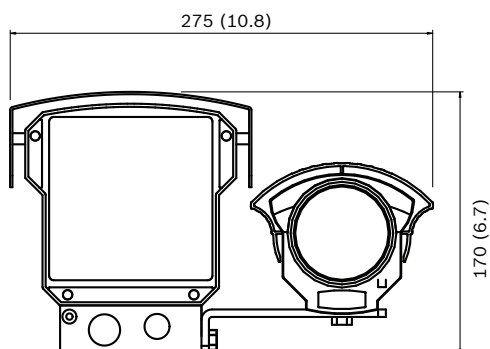

### Ordering chart

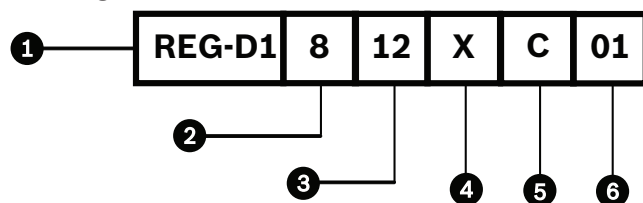

<b>1 Model</b>	<b>REG-D1</b>	
<b>2 Wavelength</b>	8	850 nm
<b>3 Lens</b>	012	12 mm
	016	16 mm
	025	25 mm
	035	35 mm
	050	50 mm
	075	75 mm
<b>4 Camera Type</b>	X	Standard
<b>5 Region</b>	C	CCIR
	E	EIA
<b>6 Color</b>	01	Black

## Technical Specifications

Operational Range	Up to 30 m (100 ft) or 25 m (80 ft) depending on number plate size
Camera Sensors	License plate capture and color overview camera: LXR CCD sensors
Camera Resolution	License plate capture camera: 520 TVL Color overview camera: 520 TVL color / 540 TVL monochrome
IR Illumination	850 nm LED infrared array
Typical Operational Life	> 5 years
Power Input	12 – 24 VAC or VDC
Power Consumption	30 W max.
Operational Temp. Range	-50°C to +50°C (-58°F to +122°F)
Construction	Robust, weather sealed aluminum casting and extrusion
Environmental	IP66 / NEMA 4
Dimensions	281 x 275 x 170 mm (11.0 x 10.8 x 6.6 in)
Weight	5.8 kg (12.7 lb)
Color	Black as standard (RAL B401)
Bracket	Order bracket separately

### Camera Selection Tables

Range for 12 x 6 in (305 x 152 mm) number plates (common in North America)

Model	Range	Optimal Distance
REG-D1-816	4 to 7 m (12 to 22 ft)	5 m (16 ft)
REG-D1-825	6 to 10 m (20 to 34 ft)	8 m (25 ft)
REG-D1-835	8 to 15 m (27 to 48 ft)	11 m (35 ft)
REG-D1-850	12 to 21 m (40 to 68 ft)	15 m (50 ft)
REG-D1-875	17 to 24 m (55 to 80 ft)	23 m (75 ft)

Range for 520 x 111 mm (20.5 x 4.4 in) number plates (common in Europe)

Model	Range	Optimal Distance
REG-D1-812	3 to 6 m (10 to 20 ft)	5 m (16 ft)
REG-D1-816	5 to 8 m (16 to 26 ft)	7 m (23 ft)
REG-D1-825	7 to 12 m (23 to 40 ft)	10 m (33 ft)
REG-D1-835	11 to 18 m (34 to 60 ft)	15 m (50 ft)
REG-D1-850	17 to 25 m (56 to 82 ft)	22 m (72 ft)
REG-D1-875	22 to 30 m (72 to 100 ft)	28 m (92 ft)

### Ordering Information

<b>REG-D1-812XC-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 12 mm, SX8 camera, CCIR, black	<b>REG-D1-812XC-01</b>
<b>REG-D1-816XC-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 16 mm, SX8 camera, CCIR, black	<b>REG-D1-816XC-01</b>
<b>REG-D1-825XC-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 25 mm, SX8 camera, CCIR, black	<b>REG-D1-825XC-01</b>
<b>REG-D1-835XC-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 35 mm, SX8 camera, CCIR, black	<b>REG-D1-835XC-01</b>
<b>REG-D1-850XC-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 50 mm, SX8 camera, CCIR, black	<b>REG-D1-850XC-01</b>
<b>REG-D1-816XE-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 16 mm, SX8 camera, EIA, black	<b>REG-D1-816XE-01</b>
<b>REG-D1-825XE-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 25 mm, SX8 camera, EIA, black	<b>REG-D1-825XE-01</b>
<b>REG-D1-835XE-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 35 mm, SX8 camera, EIA, black	<b>REG-D1-835XE-01</b>
<b>REG-D1-850XE-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 50 mm, SX8 camera, EIA, black	<b>REG-D1-850XE-01</b>
<b>REG-D1-875XE-01 License Plate Camera</b> License plate reader with LED 850 nm, lens 75 mm, SX8 camera, EIA, black	<b>REG-D1-875XE-01</b>
<b>Accessories</b>	
<b>EXMB.015B Pole Mount Adapter Bracket</b> Pole Mount Adapter, black	<b>EXMB.015B</b>
<b>EXMB.017B Wall Mount Adapter Bracket</b> Wall Mount Adapter, Black	<b>EXMB.017B</b>
<b>EXMB.028B Cable Managed Wall Bracket</b> Cable-managed arm bracket, black	<b>EXMB.028B</b>
<b>EXMB.029B Ceiling Mount Bracket</b> Ceiling Mount Bracket, Black	<b>EXMB.029B</b>
<b>EXMB.061 Pole Top Bracket</b> Stainless Pole Top Bracket	<b>EXMB.061</b>
<b>UPA-2450-60 Power Supply</b> 120 VAC, 60 Hz, 24 VAC, 50 VA Out	<b>UPA-2450-60</b>
<b>UPA-2450-50 Power Supply</b> 220 VAC, 50 Hz, 24 VAC, 50 VA Out	<b>UPA-2450-50</b>

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

<b>Asia-Pacific:</b> Robert Bosch (SEA) Pte Ltd, Security Systems 11 Bishan Street 21 Singapore 573943 Phone: +65 6258 5511 Fax: +65 6571 2698 apr.securitysystems@bosch.com www.boschsecurity.com	<b>Represented by</b>
---	-----------------------